


Technical information



Micro Precision 3.28 MK II Tweeter

MK II Version 01.2012


Full aluminium housing.
Hexagon grill.



Technical Data

Height total	27 mm incl. Grill	FS	1542 Hz / 9.24 Ω
Outer Diameter	49,3 mm	Sensitivity	90 dB 2,83V/1m.
Cutout Diameter	42,7 mm	R-DC	2,97 Ω
Interior Depth	14,0 mm	Power handling	60 W
		Voicecoil	Aluminium
		Voicecoil diameter	28 mm
		Membrane	Coated Silk
		K2 < 1%	> 1600 Hz
Weight	150 gr. / Pair	K3 < 1%	> 300 Hz

Technical information




Micro Precision 3.28 MK II Tweeter

Micro-Precision Measurement

Uedem 13:46 am 18/1/2012

Modell : 3.28 MK II Tweeter

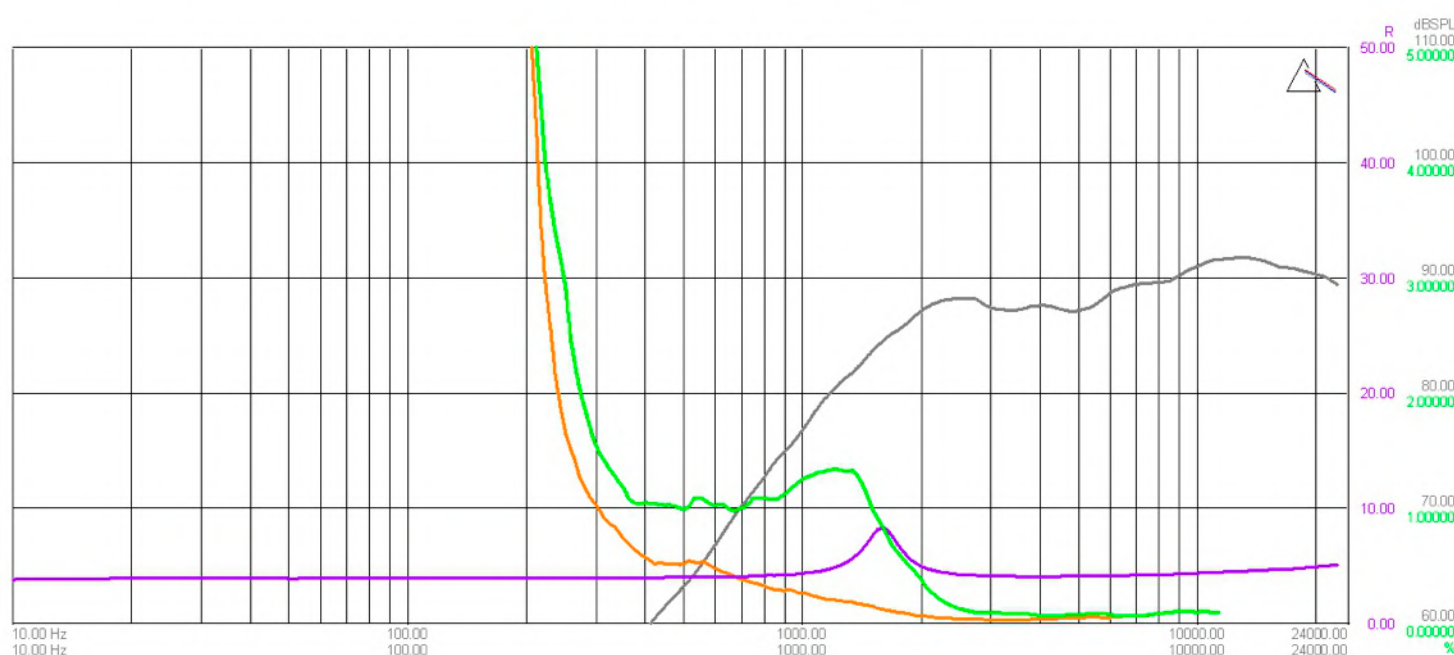

Line	Name	Points	Log X	Log Y	Cursor X	Cursor Y	Comment/label
—	Ch A Fundamental	348	☒	☒	☒	☒	
—	Ch A 2nd Harmonic	348	☒	☒	☒	☒	
—	Ch A 3rd Harmonic	348	☒	☒	☒	☒	
—	Ch B Impedance Magnitude in Ohms	348	☒	☒	☒	☒	