

## Micro Precision 5-Series Speakercable



### 5-Series Speakercable 2.5 sqmm / AWG 13

Made in Germany under Micro-Precision specification. Speakercable is an important part of the signal path.

Signalpath should be always clean and low loss. Inductance and capacity should be low for best transportation of small details.

This cable is based on physical rules.

1. OFC copper core.
2. Silver outer core. Resistance is  $< > 10\%$  below copper specification.
3. Prevent Skin Effect by extreme thin, outer 264x0.07mm silverwire mesh.
4. Big distance between the positive and negative core to prevent loss by capacity.
5. „Meter printing“ on cable to read / calculate length easily.
6. Matte black isolation always looks great after install.
7. High Quality gold plated OFC crimp sleeves and bananaplug available.

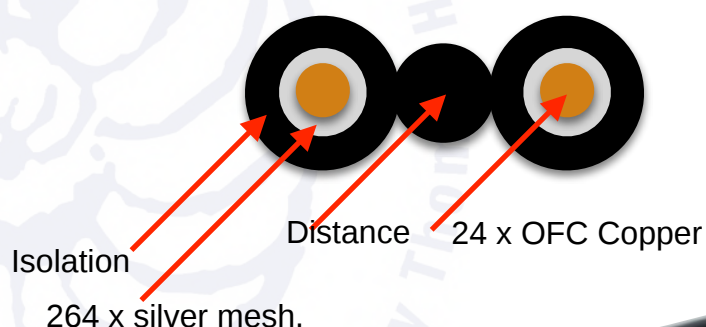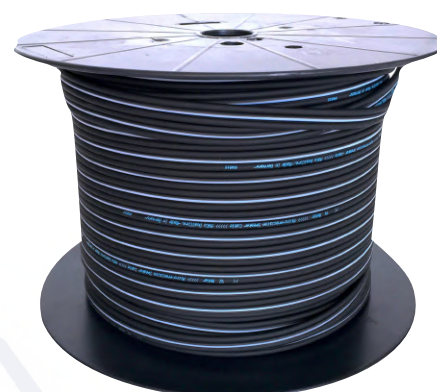

### Technical Data

|                |           |               |                          |
|----------------|-----------|---------------|--------------------------|
| Height total   | 185 mm    | DC-Resistance | 0,00648 $\Omega$ / Meter |
| Outer Diameter | 275 mm    | Inner Core    | 24 x OFC-CU              |
| Inner Diameter | 33 mm     | Outer Core    | 264 x Silverwire         |
| Weight         | 9.4 kG    | Area          | 2.5 sqmm                 |
| QTY            | 100 Meter | AWG           | 13                       |
|                |           | DCR / 100 m   | 0,6486 $\Omega$          |